


Limiting Speed - Oil	4100 RPM
Limiting Speed - Grease	3200 RPM
Roller Type	Cylindrical
Bearing Type	Needle Roller Bearing
Outside Ring Type	Cylindrical
Enclosure	Double Sealed
Drive Type	Hex
Configuration	One
Torque	52.0 lb·ft 230 N·m
Static Load Rating	1260 lbf 5600 N
Dynamic Load Rating	12300 lbf 54500 N
Weight	2.646 lb 1.200 kg
Operating Temperature Range	-40 to 250 °F -40 to 120 °C

Dimensional Specifications

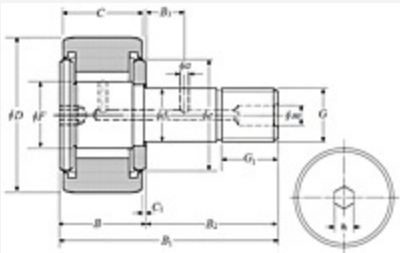

Cam Follower Stud Type Track Roller Bearing - Cylindrical O.D., CRV..LLH Type - Dimensions

G	1-14UNF
B1	3.8110 in 96.800 mm

B2	2.2520 in 57.200 mm
D	2.5000 in 63.500 mm
D Tolerance	0/-0.0020 in 0/-0.050 mm
B	1.5591 in 39.600 mm
C	1.5000 in 38.100 mm
C Tolerance	0/-0.0051 in 0/-0.130 mm
d1	1.0000 in 25.400 mm
d1 Tolerance	0.0010/0 in 0.025/0 mm
G1	1.1260 in 28.600 mm
e	1.7323 in 44.000 mm
B3	0.5626 in 14.290 mm
a	0.1969 in 5.000 mm
F	1.2264 in 31.150 mm
C1	0.0315 in 0.800 mm
h	0.5000 in 12.700 mm
m	0.2362 in 6.000 mm
m	0.2362 in 6.000 mm

Grease Nipple Size

NIP-B6