


NTN BEARING CORPORATION OF AMERICA

Head Office

 1501 Woodfield Rd,
Schaumburg, IL 60173


Phone: 847-298-7500

Fax: 847-699-9744

Toll Free: 800-323-2358

Email: mkt@ntnamerica.com
Website: www.ntnamericas.com

Item # CRV24XLLH

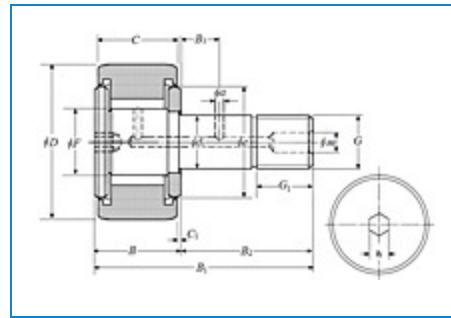
[Order Now](#) | [Technical Specifications](#) | [Dimensional Specifications](#)

Order Now

Ordering Options

[FIND A DISTRIBUTOR](#)
[CONTACT NTN CUSTOMER SUPPORT SPECIALIST](#)
[ORDER THROUGH NTN DOL \(AUTHORIZED DISTRIBUTORS ONLY\)](#)

Technical Specifications

Type


Cam Follower

Material

Through Hardened Steel

Thread Type	Inch
Cage Material	Steel
Limiting Speed - Oil	6200 RPM
Limiting Speed - Grease	4800 RPM
Roller Type	Cylindrical
Bearing Type	Needle Roller Bearing
Outside Ring Type	Cylindrical
Enclosure	Double Sealed
Drive Type	Hex
Configuration	One
Torque	11.0 lb·ft 51 N·m
Static Load Rating	483 lbf 2150 N 2.15 kN
Dynamic Load Rating	4743 lbf 21100 N 21.10 kN
Weight	0.573 lb 0.260 kg
Operating Temperature Range	-40 to 250 °F -40 to 120 °C

Dimensional Specifications

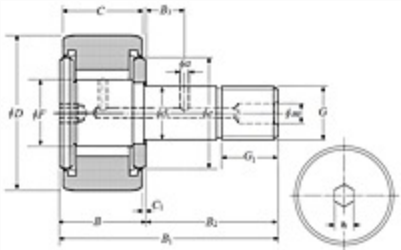

Cam Follower Stud Type Track Roller Bearing - Cylindrical O.D., CRV..LLH Type - Dimensions

G	5/8-18UNF
B1	2.4370 in 61.900 mm
B2	1.5000 in 38.100 mm
D	1.5000 in 38.100 mm
D Tolerance	0/-0.0020 in 0/-0.050 mm
B	0.9370 in 23.800 mm
C	0.8750 in 22.225 mm
C Tolerance	0/-0.0051 in 0/-0.130 mm
d1	0.6250 in 15.875 mm
d1 Tolerance	0.0010/0 in 0.025/0 mm
G1	0.7520 in 19.100 mm
e	1.0630 in 27.000 mm
B3	0.3752 in 9.530 mm
a	0.1575 in 4.000 mm
F	0.8268 in 21.000 mm
C1	0.0315 in 0.800 mm
h	0.3125 in 7.938 mm

m	0.2362 in 6.000 mm
m	0.2362 in 6.000 mm
Grease Nipple Size	NIP-B6