


NTN BEARING CORPORATION OF AMERICA

Head Office

 1501 Woodfield Rd,
Schaumburg, IL 60173


Phone: 847-298-7500

Fax: 847-699-9744

Toll Free: 800-323-2358

Email: mkt@ntnamerica.com
Website: www.ntnamericas.com

Item # CRV28XLLH

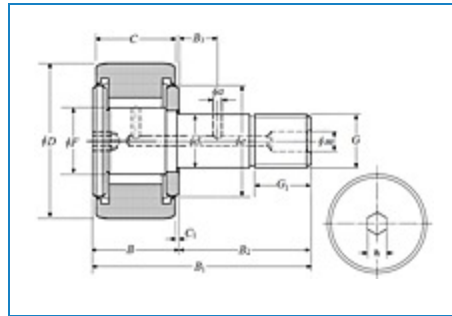
[Order Now](#) | [Technical Specifications](#) | [Dimensional Specifications](#)

Order Now

Ordering Options


[FIND A DISTRIBUTOR](#)
[CONTACT NTN CUSTOMER SUPPORT SPECIALIST](#)
[ORDER THROUGH NTN DOL \(AUTHORIZED DISTRIBUTORS ONLY\)](#)

Technical Specifications

Type	Cam Follower
Material	Through Hardened Steel
Thread Type	Inch

Limiting Speed - Oil	5300 RPM
Limiting Speed - Grease	4100 RPM
Roller Type	Cylindrical
Bearing Type	Needle Roller Bearing
Outside Ring Type	Cylindrical
Enclosure	Double Sealed
Drive Type	Hex
Configuration	One
Torque	21.0 lb·ft 92 N·m
Static Load Rating	650 lbf 2900 N
Dynamic Load Rating	6400 lbf 28400 N
Weight	0.882 lb 0.400 kg
Operating Temperature Range	-40 to 250 °F -40 to 120 °C

Dimensional Specifications

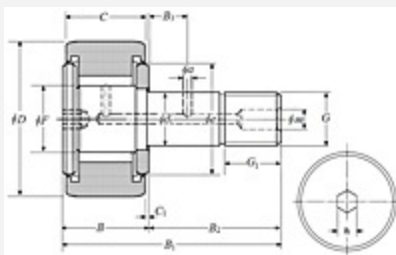

Cam Follower Stud Type Track Roller Bearing - Cylindrical O.D., CRV..LLH Type - Dimensions

G	3/4-16UNF
B1	2.8110 in 71.400 mm

B2	1.7520 in 44.500 mm
D	1.7500 in 44.450 mm
D Tolerance	0/-0.0020 in 0/-0.050 mm
B	1.0591 in 26.900 mm
C	1.0000 in 25.400 mm
C Tolerance	0/-0.0051 in 0/-0.130 mm
d1	0.7500 in 19.050 mm
d1 Tolerance	0.0010/0 in 0.025/0 mm
G1	0.8740 in 22.200 mm
e	1.4370 in 36.500 mm
B3	0.4374 in 11.110 mm
a	0.1575 in 4.000 mm
F	0.9705 in 24.650 mm
C1	0.0315 in 0.800 mm
h	0.3125 in 7.938 mm
m	0.2362 in 6.000 mm
m	0.2362 in 6.000 mm

Grease Nipple Size

NIP-B6